

Discovery Marine Heat Detector



Technical data

All data is supplied subject to change without notice. Specifications are typical at 24V, 23°C and 50% RH unless otherwise stated.

| | |
|----------------------------|---|
| <i>Detection principle</i> | <i>Heat sensitive resistance</i> |
| <i>Sensor</i> | <i>Single NTC thermistor</i> |
| <i>Sampling frequency</i> | <i>Continuous</i> |
| <i>Supply Wiring</i> | <i>Two wire supply, polarity insensitive</i> |
| <i>Terminal functions</i> | <i>L1 and L2 Supply in and out connections</i> |
| | <i>+R Remote indicator positive connection (internal 2.2 kΩ resistance to positive)</i> |
| | <i>-R Remote indicator negative connection (internal 2.2 kΩ resistance to negative)</i> |

| | |
|-------------------------------|--|
| <i>Operating voltage</i> | <i>17 - 28 V dc</i> |
| <i>Communication protocol</i> | <i>XP95, Discovery and CoreProtocol compatible</i> |
| | <i>5 V to 9 V peak to peak</i> |

| | |
|-------------------------------|---|
| <i>Quiescent current</i> | <i>400 μA</i> |
| <i>Power-up surge current</i> | <i>1mA</i> |
| <i>Maximum power-up time</i> | <i>10 seconds</i> |
| <i>Alarm indicator</i> | <i>Two red light emitting diodes (LEDs) Optional remote LED</i> |

| | |
|--------------------------------------|--|
| <i>Alarm level analogue value</i> | <i>55</i> |
| <i>Alarm LED current</i> | <i>3.5 mA</i> |
| <i>Remote output characteristics</i> | <i>Connects to positive line through 4.5 kΩ (5 mA maximum)</i> |

| | |
|------------------------------|--|
| <i>Storage temperature</i> | <i>-40°C to +80°C</i> |
| <i>Operating temperature</i> | <i>See table overleaf response mode temperatures</i> |

| | |
|--|---------------------|
| <i>Humidity (no condensation or icing)</i> | <i>0% to 95% RH</i> |
|--|---------------------|

| | |
|---------------------------------------|-------------|
| <i>Effect of atmospheric pressure</i> | <i>None</i> |
|---------------------------------------|-------------|

| | |
|-----------------------------|--------------------------------------|
| <i>Effect of wind speed</i> | <i>None in fixed temperature use</i> |
|-----------------------------|--------------------------------------|

| | |
|--------------------------------------|----------------|
| <i>Vibration, impact & shock</i> | <i>EN 54-5</i> |
|--------------------------------------|----------------|

| | |
|------------------|-------------------------|
| <i>IP Rating</i> | <i>designed to IP54</i> |
|------------------|-------------------------|

| | |
|----------------------------------|---|
| <i>Standards & approvals</i> | <i>EN 54-5, CPD, LPCB, MED, LR, DNV-GL, BV, ABS, CCS, KRS and VNIPO</i> |
|----------------------------------|---|

| | |
|-------------------|--|
| <i>Dimensions</i> | <i>100 mm diameter x 42 mm height (50 mm height with XPERT 7 base)</i> |
|-------------------|--|

| | |
|---------------|--|
| <i>Weight</i> | <i>105 g (160 g with XPERT 7 base)</i> |
|---------------|--|

| | |
|------------------|---|
| <i>Materials</i> | <i>Housing: White flame-retardant polycarbonate</i> |
| | <i>Terminals: Nickel plated stainless steel</i> |

Product overview

| | |
|------------------------------|---|
| Product | Marine Heat Detector |
| Part No. | 58000-400MAR |
| Digital Communication | XP95, Discovery and CoreProtocol® compatible |

Approvals



Product information

The Discovery Marine Heat Detector uses a single thermistor to sense the air temperature at the detector position. The thermistor is connected in a resistor network, which produces a voltage output dependent on temperature. The design of the resistor network, together with the processing algorithm in the micro-controller, gives an approximately linear characteristic from 10°C to 80°C. This linearised signal is further processed, depending upon the response mode selected, and converted to an analogue output.

- Unaffected by wind or atmospheric pressure
- Ideal for environments that are dirty or smoky under normal circumstances
- Well suited to galleys and smoking rooms
- Five EN54 approved response modes
- Remote test feature


Operation

In the Discovery Marine Heat Detector, the five response modes correspond to the five 'classes' as defined in EN 54-5. The classes in this standard correspond to different behaviour, each of which is designed to be suitable for a range of application temperatures. All modes incorporate 'fixed temperature' response, which is defined in the standard by the 'static response temperature'. The application temperatures and static response temperatures for all response modes are given in the table on the right.

In addition to the basic classification, a detector may be given an 'R' or 'S' suffix.

The 'R' suffix indicates that the detector has been shown to have a rate-of-rise characteristic. Such a detector will still give a rapid response even when starting from an ambient temperature well below its typical application temperature. This type of detector is therefore suitable for unheated areas in which the ambient temperature may be very low for long periods.

The 'S' suffix on the other hand indicates that the detector will not respond below its minimum static response temperature even when exposed to high rates of rise of air temperature. This type of detector is therefore suitable for areas such as galleys and engine rooms where large, rapid temperature changes are considered normal.

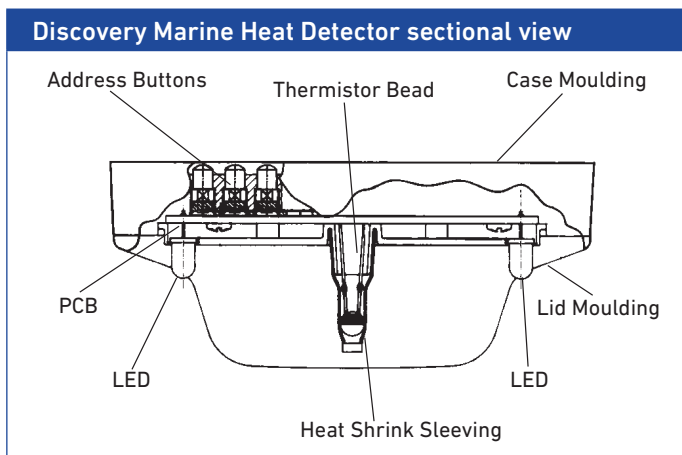

Electrical description

The Discovery Marine Heat Detector is designed to be connected to a two wire loop circuit carrying both data and a 17 V to 28 V dc supply. The detector is connected to the incoming and outgoing supply via terminals L1 and L2 in the mounting base. A remote LED indicator requiring not more than 4 mA at 5 V may be connected between the +R and -R terminals. An earth connection terminal is also provided.

Features

Response modes

Discovery Marine Heat Detectors can be operated in any one of five EN54 approved response modes, which can be selected through the fire control panel. Each mode corresponds to a unique response behaviour, which is related to sensitivity to fire. Mode 1 gives a higher sensitivity to fire than Mode 5.

| Discovery Marine Heat Detector response modes | | | | | | |
|---|---------------|-------------------------|------|--------------------------------|------|-------|
| Mode | Class EN54- 5 | Application temperature | | Static Response Temperature °C | | |
| | | Typical | Max | Min | Typ | Max |
| 1 | A1R | 25°C | 50°C | 54°C | 57°C | 65°C |
| 2 | A2R | 25°C | 50°C | 54°C | 61°C | 70°C |
| 3 | A2S | 25°C | 50°C | 54°C | 61°C | 70°C |
| 4 | CR | 55°C | 80°C | 84°C | 90°C | 100°C |
| 5 | CS | 55°C | 80°C | 84°C | 90°C | 100°C |

Flashing LEDs

Discovery Marine Heat Detectors have two integral LED indicators, which can be illuminated at any time by the fire control panel to indicate detectors in alarm. A flashing LED mode can also be programmed to activate each time a detector is polled.

Remote test feature

The remote test feature is enabled from the fire control panel. On receipt of the command signal from the fire control panel, the detector is forced electrically into alarm. An analogue value of 85 is returned to the fire control panel to indicate that the detector is working correctly.

Rejection of transient signals

Discovery detectors are designed to give low sensitivity to very rapid changes in the sensor output, since these are unlikely to be caused by real fire conditions, resulting in fewer false alarms.

Drift compensation

Discovery Marine Heat Detectors include compensation for signal drift to compensate for changes in the sensor output caused, for example by dust in the chamber, and will therefore hold the sensitivity at a constant level even with severe chamber contamination. This increased stability is achieved without significantly affecting the detectors sensitivity to fire whilst still meeting the requirements of the EN54 standard.

EMC Directive 2014/30/EU

The Discovery Marine Heat Detector complies with the essential requirements of the EMC Directive 2014/30/EU provided that it is used as described in this data sheet.

A copy of the Declaration of Conformity is available from Apollo upon request.

Conformity of the Discovery Marine Heat Detector with the EMC Directive, does not confer compliance with the directive on any apparatus or systems connected to it.


Construction Products Regulation 305/2011/EU

The Discovery Marine Heat Detector complies with the essential requirements of the Construction Products Regulation 305/2011/EU.

A copy of the Declaration of Performance is available from Apollo upon request.

Marine Equipment Directive 2014/90/EU

The Discovery Marine Heat Detector complies with the essential requirements of the Marine Equipment Directive 2014/90/EU.

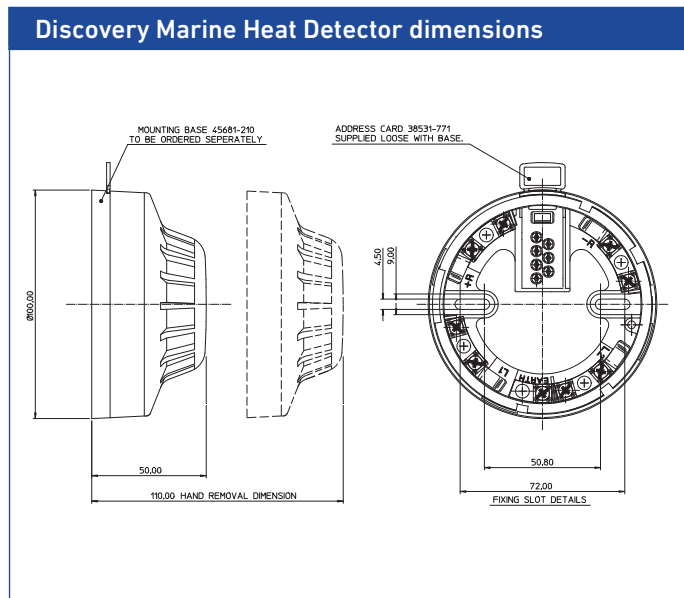

Note: Should be used with Deckhead Mounting Box - Part No. 45681-217 if ingress protection is required.

This page has intentionally been left blank